


## Product Specifications

Rotation:	CW / CCW
Motor housing:	Aluminum
Pinion housing:	Ductile iron
Barrel:	Steel
Piston:	Steel Alloy
Number of pistons:	9
Displacement:	5.88in <sup>3</sup> /REV
Speed range:	0-3000 RPM
Drive type:	Inertia
Maximum working pressure:	3000 PSI
Duty cycle:	Intermittent
Maximum Torque:	200 Ft.-lbs.
Weight:	46.0 lbs
Overall volumetric efficiency:	92%
Recommended fluid:	Red hydraulic fluid (MIL-H-5606)
Inlet Port:	SAE-8
Outlet Port:	SAE-8
Available Flanges:	SAE-1, SAE-2, SAE-3, Custom


## E SERIES (CME) HYDROTOR<sup>®</sup>



## Flow vs. Speed

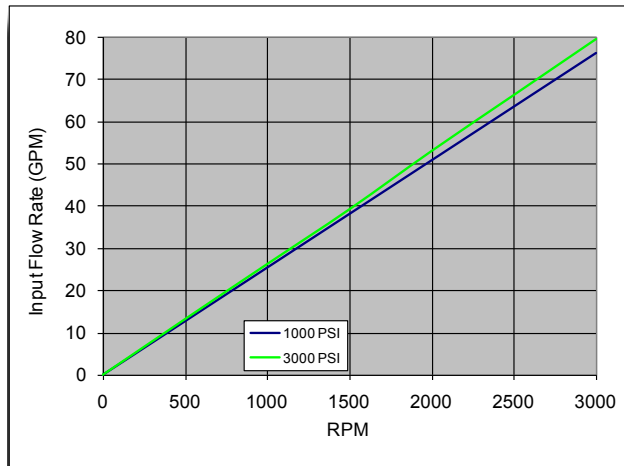

## Torque vs. Speed

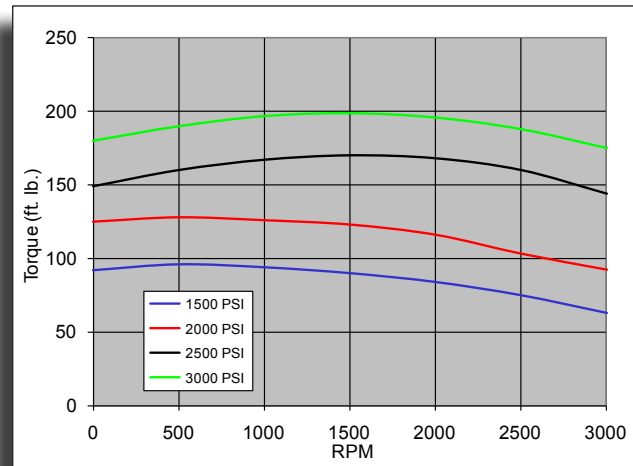

## General Dimensions

